
TECHNICAL SPECIFICATIONS

SYSTEM SPECIFICATIONS	MF222 ^{plus}	MF282 ^{plus}	MF362 ^{plus}	MF452 ^{plus}	MF552 ^{plus}
Paper-in capacity	Standard: 1.150	Standard: 1.150	Standard: 1.150	Standard: 1.150	Standard: 1.150
	Max: 3.650	Max: 3.650	Max: 3.650	Max: 6.650	Max: 6.650
Paper-out capacity	Up to 3300 cut sheets w	ith finisher, up to 250 cut s	heets without finisher		
Monthly copy/print	80.000 pages	100.000 pages	125.000 pages	150.000 pages	200.000 pages
throughput					
Black toner duration	Up to 27.000 pages	Up to 27.000 pages	Up to 27.000 pages	Up to 27.500 pages	Up to 27.500 pages
CMY toner duration	Up to 25.000 pages	Up to 25.000 pages	Up to 25.000 pages	Up to 26.000 pages	Up to 26.000 pages
Duration black images unit	Up to 70.000 pages	Up to 120.000 pages	Up to 120.000 pages	Up to 130.000 pagine	Up to 135.000 pages
	(Drum)	(Drum)	(Drum)	(Drum)	(Drum)
	Up to 600.000 pages	Up to 600.000 pages	Up to 600.000 pages	Up to600.000 pages	Up to 600.000 pages
	(Developer)	(Developer)	(Developer)	(Developer)	(Developer)
Duration CMY images unit	Up to 55.000 pages	Up to 75.000 pages	Up to 90.000 pages	Up to 95.000 pages	Up to 95.000 pages
	(Drum)	(Drum)	(Drum)	(Drum)	(Drum)
	Up to 600.000 pages	Up to 600.000 pages	Up to 600.000 pages	Up to 600.000 pages	Up to 600.000 pages
	(Developer)	(Developer)	(Developer)	(Developer)	(Developer)
System dimensions (WxDxH)	615 x 685 x 779 mm	615 x 685 x 779 mm	615 x 685 x 779 mm	615 x 685 x 921 mm	650 x 685 x 921 mm
Neight	Approximately 85 kg	Approximately 85 kg	Approximately 85 kg	Approximately 101 kg	Approximately 101 kg
Automatic duplex	A5-SRA3, 52-256 gm ²				
System memory	2048 Mb				
Hard disk	250 Gb				
nterface		1.000-Base-T Ethernet, US			
Network protocol			therTalk), SMB, LPD, IPP, SN	IMP, HTTP	
Paper format		aper format, banner paper	r max. 1.200 x 297 mm		
Paper weight Power absorption/	52-300 gm ²	1 E 1) (/			
Power absorption/					
•	220-240V / 50/60 Hz Ma	IX I.J KVV (Systern)			
•	220-240V7 50/00 Hz Ma	ax 1.5 kvv (system)			
consumption	220-2407 30/00 12 106	ix 1.5 kw (system)			
consumption PRINTER	1.800 equivalenti x 600 d	-			
consumption PRINTER Print resolution		-			
consumption PRINTER Print resolution CPU Type controller	1.800 equivalenti x 600 (800 Mhz	-	PS		
consumption PRINTER Print resolution CPU Type controller Page description	1.800 equivalenti x 600 (800 Mhz	dpi, 1.200 x 1.200 dpi	PS		
consumption PRINTER Print resolution CPU Type controller Page description language	1.800 equivalenti x 600 (800 Mhz PCL 6c (XL3.0), PCL 5c, F	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X	PS Vindows 7 32/64bit, Server	2003/2008 32/64bit, 200	8 R2/2012 64bit,
consumption PRINTER Print resolution CPU Type controller Page description language	1.800 equivalenti x 600 (800 Mhz PCL 6c (XL3.0), PCL 5c, F	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X Vindows VISTA 32/64bit, V		2003/2008 32/64bit, 200	8 R2/2012 64bit,
Consumption PRINTER Print resolution CPU Type controller Page description language Operating system	1.800 equivalenti x 600 (800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix		2003/2008 32/64bit, 200	8 R2/2012 64bit,
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin			
Consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin	Vindows 7 32/64bit, Server		
Consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X Vindows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte	Vindows 7 32/64bit, Server		
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning,	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection	Mixplex, OOXML (DOCX, >	(LSX, PPTX)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm		
Consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour)	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional)	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional)	Mixplex, OOXML (DOCX, >	(LSX, PPTX)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi)	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals	Mixplex, OOXML (DOCX, >	(LSX, PPTX) N.A
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print fonts SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm	(LSX, PPTX) N.A Up to 80 opm/160 ipn
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour)	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard)	(LSX, PPTX) N.A Up to 80 opm/160 ipn (standard)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print fonts SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi)	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm	(LSX, PPTX) N.A Up to 80 opm/160 ipn
Consumption PRINTER Print resolution CPU Type controller Page description anguage Operating system Print fonts Print fonts SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard)	(LSX, PPTX) N.A Up to 80 opm/160 ipn (standard)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print fonts SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard)	(LSX, PPTX) N.A Up to 80 opm/160 ipn (standard)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print fonts SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard)	(LSX, PPTX) N.A Up to 80 opm/160 ipn (standard)
Consumption PRINTER Print resolution CPU Type controller Page description anguage Operating system Print fonts Print fonts CANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic feeds	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF A6-A3, 35-163 gm ²	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard)	(LSX, PPTX) N.A Up to 80 opm/160 ipn (standard)
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic feeds Scan resoluti	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF A6-A3, 35-163 gm ² Max.: 600 x 600	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), X /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard) 100 originals	KLSX, PPTX) N.A Up to 80 opm/160 ipn (standard) 100 originals
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic feeds Scan resoluti	1.800 equivalenti x 600 o 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF A6-A3, 35-163 gm ² Max.: 600 x 600 Network TWAIN scan, sc	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), Xi /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals an-to-eMail (scan-to-Me),	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional)	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard) 100 originals	KLSX, PPTX) N.A Up to 80 opm/160 ipn (standard) 100 originals
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic feeds Scan resoluti Scan modes	1.800 equivalenti x 600 of 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF A6-A3, 35-163 gm ² Max.: 600 x 600 Network TWAIN scan, sc scan-to-WebDAV, scan-t	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), Xi /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals an-to-eMail (scan-to-Me), o-DPWS, scan-to-USB	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals scan-to-FTP, Scan-to-SMB	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard) 100 originals (scan-to-Home), scan-to-B	(LSX, PPTX) N.A Up to 80 opm/160 ipm (standard) 100 originals
consumption PRINTER Print resolution CPU Type controller Page description language Operating system Print fonts Print functions SCANNER Scan speed (B/W and colour) R-ADF (300 dpi) Scan speed (B/W and colour) Dual scan (300 dpi) Automatic document feed Paper weight automatic feeds Scan resoluti Scan modes File formats	1.800 equivalenti x 600 d 800 Mhz PCL 6c (XL3.0), PCL 5c, F Windows XP 32/64bit, W Macintosh OS X 10.x, Un 80x PCL Latin, 137x Post Direct printing PCL, PS, T "Easy Set" job planning, Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals R-ADF o Dualscan ADF A6-A3, 35-163 gm ² Max.: 600 x 600 Network TWAIN scan, sc scan-to-WebDAV, scan-t JPEG, TIFF, PDF, PDF/A 1a	dpi, 1.200 x 1.200 dpi PostScript 3 (CPSI 3016), Xi /indows VISTA 32/64bit, V ix/Linux/Citrix Script 3, Emulation Latin IFF, XPS, PDF and encrypte superimposition, waterma Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals an-to-eMail (scan-to-Me), o-DPWS, scan-to-USB	Vindows 7 32/64bit, Server ed PDF files, Mixmedia and rk, copy protection Up to 80 opm (optional) 100 originals Up to 80 opm/160 ipm (optional) 100 originals scan-to-FTP, Scan-to-SMB	Mixplex, OOXML (DOCX, > N.A Up to 80 opm/160 ipm (standard) 100 originals (scan-to-Home), scan-to-B	(LSX, PPTX) N.A Up to 80 opm/160 ipm (standard) 100 originals

FINISHER OPTIONS



mixplex /

mixmedia



sorting

insertion,

report





Letter fold



COPIER	MF222 ^{plus}	MF282 ^{plus}	
Copy/print speed	22	28	
4 (B/W and colour)			
Copy/print speed	14	14	
A3 (B/W and colour)			
Duplex speed	22	28	
A4 (B/W and colour)			
irst copy/print out B/W)	6,9	5,9	
First copy/print out colour)	8,3	7,7	
Varm-up time	Approximately 20*	Approximately 20*	
	* (warm-up time may vary depending on type of use		
Print process	Electrostatic, indirect Tano	dem laser copy	
oner type	Chemical polymer toner		
Copy resolution	600 x 600		
Gradations	256 gradations		
Driginal format	A5-A3		
nlargement	25-400 %, with 0,1 % in	crements, automatic zoom	
Copy functions	Chapter, insertion page and cover, trial copy (print ar		
	job memory, poster mode, image repeat, superimpos		
JSER BOX SPECIFICATION			
Max. box memory	Up to 3,000 documents or 10,000 pages		
ypes of box system	Public, Private (with password or authentication); Gro		
ypes of box system	Secure printing, encrypted PDF printing, fax receipt, f		
Box functions	Re-print, combination, download, send (e-mail, FTP,		
AX			
ax standard	Super G3 (optional)		
av tracmission	Applog i Eav: colour i Eav (PEC 2040 C) ID Eav		

Fax standard	Super G3 (optional)
Fax trasmission	Analog, i-Fax; colour i-Fax (RFC3949-C), IP-Fax
Fax resolution	Max. 600 x 600 (ultra-fine)
Fax compression	MH, MR; MMR, JBIG
Modem Fax	Up to 33.6
Fax output	2.100 (single + group)
Fax functions	Polling, deferred transmission, PC-Fax, reception in p

Performance refers to use of the product in optimal conditions. With the right to change technical characteristics. The registered trademarks are the property of their respective owners. The d-Color MF222plus /MF282plus /MF362plus /MF452plus /MF552plus are distributed by Olivetti S.p.A. (05/13) - Code: 29011-00

olivetti S.P.A. Via Jervis 77 10015 ivrea (to) italia www.olivetti.it



MF362^{plus} 36	MF452 ^{plus} 45	MF552^{plus} 55
18	22	27
36	45	55
5,3	4,6	4,1
6,9	5,5	4,6
Approximately 20* e)	Approximately 20*	Approximately 20*

and display), adjustment trial print, digital creative functions, osition, watermark, stamp, copy protection, badge copy

Group (with authentication)	
t, fax polling	
P, SMB and fax), box-to-box copy	

private boxes, reception via email/FTP/SMB, up to 400 job programs







MULTIFUNCTION





MODULAR

SPEED



d-COLOR MF222^{plus} MF282^{plus} MF362^{plus} MF452^{plus} MF552^{plus}

Already finished .. ??? That's what users enjoying the benefits of the **new Olivetti colour** products will be asking. All the typical activities of the office workplace will be **smooth, fast** and personalisable. At the same time, thanks to compliance with the **latest environmental** impact regulations, attention will be firmly focused on eco-sustainability.



COLOUR MULTIFUNCTIONAL DIGITAL SYSTEMS

INNOVATIVE CONTROL PANEL WITH MULTI-TOUCH FUNCTIONS REMOTE CONTROL PANEL PRINT QUALITY UP TO 1200 x 1200 DPI WITHOUT LOSS OF SPEED SUPPORT FOR SPECIAL SRA3 AND BANNER PAPER FORMATS PDF/A PRODUCTION WITH OCR SUPPORT DIRECT PRINTING AND SCANNING OF POWERPOINT, EXCEL, WORD DOC 2 GB RAM AND 250 GB HDD **SLEEP MODE ENERGY CONSUMPTION 0.2 WATT**

CONTROL PANEL OR SMART PHONE?

The new A3 products are equipped with an ultrainnovative 9" colour control panel implementing newgeneration multi-touch technology, to activate a series of functions typical of smart phones, such as a zoom and image rotation. Scrolling of machine functions and related screens is much more fluid thanks to the greater intuitiveness provided by real freedom of movement. The control panel is the gateway to the machine functions, guiding the user through document creation/ sharing/archiving procedures. The high-resolution screen also allows users to consult documents saved in the user box and to display a preview of the current document. Another important innovation is access to the control panel from a remote tablet or PC: a replica of the control panel appears on the remote workstation, to provide support or control the system settings.

d-COLOR MF222plus MF282plus MF362^{plus} MF452^{plus} MF552^{plus}

CUTTING-EDGE PERFORMANCE WITH THE FOCUS ON SUSTAINABILITY

With the introduction of the new d-Color MF222plus / 282plus / 362plus / 452plus / 552plus, Olivetti enhances its A3 colour offer with a complete systems line ranging from 22 to 55 pages per minute and equipped with a series of new features to speed up machine-side activities and make user operations more flexible and fluid, while ensuring security. The systems can be configured in "kiosk" mode, giving access to pre-defined control panel screens where only the functions approved for the specific user account are available. These include internet browsing, direct printing and scanning, secure virtuous viewing of the 250 GB HDD. Special care has also been devoted to the machines' environmental footprint and energy consumption, to offer users significant cost savings and ensure eco-sustainability. In compliance with the directives of the new Energy Star 2.0 standard, the new line lowers energy consumption to 0.2 Watt in sleep mode and has Typical Energy Consumption (TEC) of 1.3 / 3.5 kWh/week, depending on the product.



9.5" multi-touch control panel with 10-key pad (optional)



Advanced security options, multiple authentication systems



Direct printing and scanning with USB, direct management of Microsoft Office formats






EXCELLENT FINISHING OPTIONS FOR PRODUCTION OF PROFESSIONAL DOCUMENTS

The advanced print functions of the new Olivetti models offer fully automatic production of professional documents. With a choice of 3 finishers, the user always has the ideal solution to turn out high-guality documents (brochures, flyers, presentations, course materials, etc.). Finisher functions can be enhanced with optional modules for punching, production of booklets, creation of z-fold leaflets or insertion of covers, as well as offset sorting.

UNLIMITED PRODUCTIVITY

The d-Color MF222plus/282plus/362plus/452plus/552 plus are equipped with an internal print controller offering PCL6/PS3 emulation and XPS compatibility, to process the majority of document formats used in today's offices. They also support Microsoft Office Open XML, to print and save Microsoft Office docx, xlsx and pptx documents directly to and from a USB pendrive. Thanks to the internal web server, documents can also be saved/printed in cloud mode, accessing archives resident for example on a corporate FTP. Should PS3 emulation not be sufficient, a Fiery option with native PS3 is available (not for the d-Color MF222plus) to optimise management of colour profiles and a full range of functions required by graphic artists.

OPTIONS

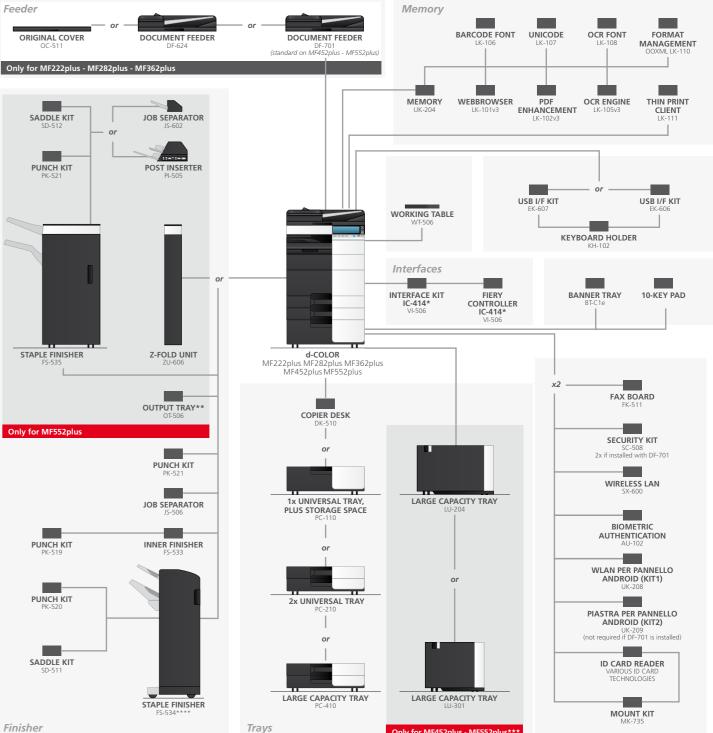

Finisher

* Not available for MF222plus

** Also available for MF452plus

** Not compatible when the copier disk is installed **** Also available in an FS-534SD version (integrated SD 511)



d-Color MF452plus



d-Color MF552plus